

NETernity™ VXS24

24 Port Gigabit Ethernet Switch

Features

- 24 port managed Gigabit Ethernet switch
- 22 ports of 1000 BaseCX to rear panel
- Two ports of optional 1000 BaseT to front panel
- Optional two 10 Gigabit uplink ports for expansion
- Layer 2/3 switching with advanced support for VLANs, QoS and IPv6
- 88 Gbits/second non-blocking switch fabric with full wire speed performance
- Additional 10/100 BaseT out-of-band management port to front panel
- Configuration through web interface
- VITA 41.3 compliant switch
- Air- or conduction-cooled
- RoHS compliant

The NETernity™ VXS24 is a fully managed (Layer 2/3) Gigabit Ethernet switch designed to meet the most demanding requirements for network switching in tactical applications. Available in both air- and conduction-cooled formats, and featuring a non-blocking shared memory architecture, the VXS24 provides an 88 Gbits/second core offering full wire speed performance with minimal latency on all ports simultaneously.

The VXS24 has 22 ports of 1000 BaseCX to the backplane in accordance with VITA 41.3, plus two SFP ports capable of supporting 100 BaseFX, 1000 BaseSX, 1000 BaseLX or 10/100/1000 BaseTX to the front panel. Each of the 1 Gigabit ports may be configured to allow in-band management.

Optionally, our XM CXGO mezzanine provides dual 10 Gigabit uplink expansion, transitioning from XAUI on the switch packet processor to the appropriate 10G standard at the front panel. The VXS24 can be expanded to a 48-port solution by connecting two VXS24s together via the 10 Gigabit ports.

Out-of-band management of the switch is accessible via 10/100 BaseT Ethernet port and RS232 serial port, both available at the front panel.

The VXS24 has comprehensive network management capabilities based on FASTPATH® software that include VLANs, link aggregation, spanning tree, IPv4, IPv6, IGMP, traffic policing, Quality of Service (QoS), guaranteed bandwidth and SNMP.

Configuration of the switch is via a comprehensive and intuitive web interface, command line interface or SNMP.



NETernity™ VXS24 -24 Port Gigabit Ethernet Switch

Specifications

Ethernet

- 22 ports of 1000 BaseCX baseband to the rear
- Two ports of Gigabit Ethernet to front panel
- Two ports 10 Gigabit via optional mezzanine to front panel

Compliance

- Compliant with VXS.0
- Complies with the VXS.3 protocol layer standard
- Implements 1000 Mbits/second baseband IEEE 802.3 links
- Section 4.0 of the VXS VMEbus Switched Serial Standard VITA 41.0-200x (VXS.0)
- IEEE 1101.10 compliant EMC front panels as defined in ANSI/VITA 1.1, VME64 extension

Management features

- Out-of-band management via 10/100 BaseTX and serial interface
- In-band management via configurable 1G ports
- Management via web interface, CLI or SNMP

Front panel SFP options

- Two 100FX ports, or
- Two 1000SX ports, or
- Two 1000LX ports, or
- Two 10/100/1000 BaseT ports.

Front panel XFP options via Mezzanine

- Two 10 Gigabit Ethernet ports via XMCXGO Mezzanine

Front panel

- Serial RS-232 on front panel
- 10/100 BaseTX out-of-band management interface on front panel

Management Protocols

- Including: IEEE 802.3ac - VLAN tagging; IEEE 802.3ad - link aggregation; IEEE 802.1S /W/D spanning tree; IPv4 and IPv6 traffic policing; access control lists; SNMP V1, V2c and V3; jumbo Ethernet frames


Environment

- Commercial version:
 - Operating temperature of 0° C to 55° C;
 - Non-operating temperature of -40° C to 85° C;
- Extended temperature version:
 - Operating temperature -40° C to 75° C;
 - Non-operating temperature -50° C to 100° C

Legislative

- The product is compliant with European Community Directive 2002/95/EC ('RoHS compliant')

Block Diagram

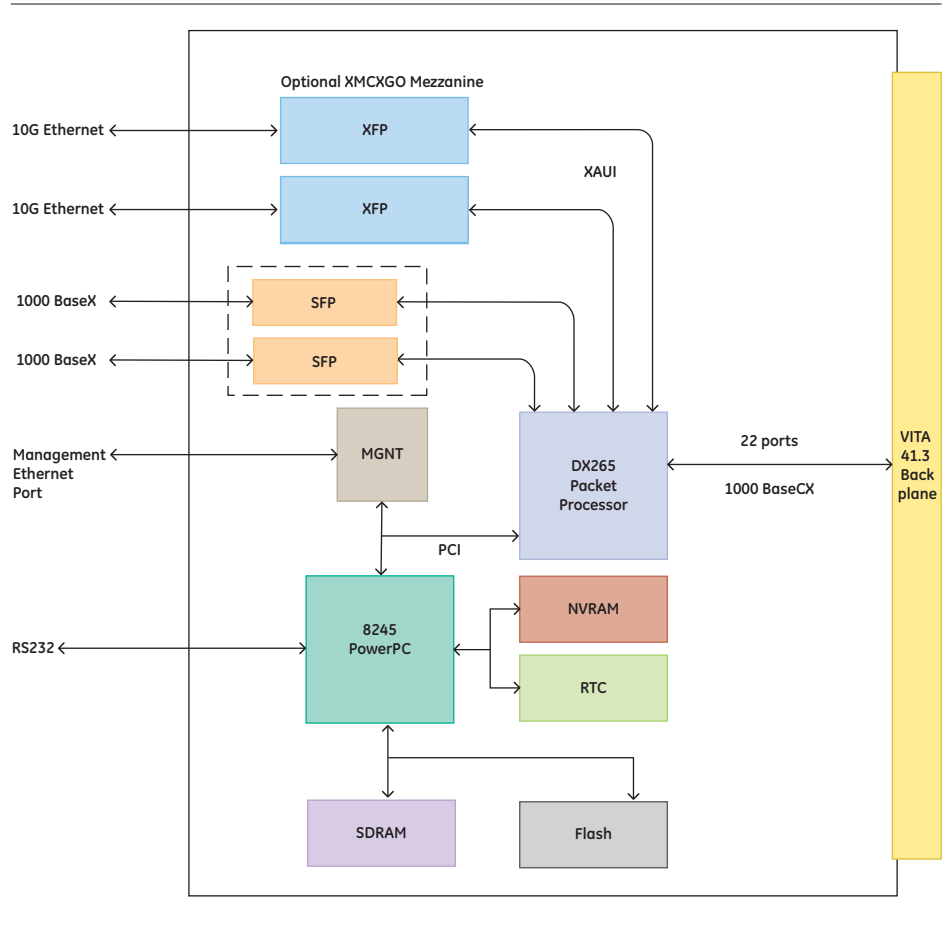

About GE Fanuc Intelligent Platforms

GE Fanuc Intelligent Platforms, a joint venture between General Electric Company (NYSE: GE) and FANUC LTD of Japan, is an experienced high-performance technology company and a global provider of hard-ware, software, services, and expertise in automation and embedded computing. We offer a unique foundation of agile, advanced and ultra-reliable technology that provides customers a sustainable advantage in the industries they serve, including energy, water, consumer packaged goods, government and defense, and telecommunications. GE Fanuc Intelligent Platforms is a worldwide company headquartered in Charlottesville, VA and is part of GE Enterprise Solutions. For more information, visit www.gefanuc.com.

GE Fanuc Intelligent Platforms Information Centers

Americas:
1 800 368 2738 or 1 703 263 1483

Asia Pacific:
+81 3 5544 3973

Europe, Middle East and Africa:
Germany: +49 821 5034-0
UK: +44 1327 359444

Additional Resources

For more information, please visit the GE Fanuc Intelligent Platforms web site at:

www.gefanuc.com

